

09/18/00
Jc658 U.S. PTO

09/19/00

A

Please type a plus sign (+) inside this box → ☒

Approved for use through 09/30/2000, OMB 0551-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. 2453-80A
First Inventor or Application Identifier H. Kenneth Staffin
Title "Fluidized Bed Gas Distributor System..."
Express Mail Label No. EK052282770US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

- ☒ * Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
- ☒ Specification (Total Pages 21)
(preferred arrangement set forth below)
- Descriptive title of the invention
- Cross References to Related Applications
- Statement Regarding Fed sponsored R & D
- Reference to Microfiche Appendix
- Background of the Invention
- Brief Summary of the Invention
- Brief Description of the Drawings (if filed)
- Detailed Description
- Claim(s)
☒ Abstract of the Disclosure
Drawing(s) (35 U.S.C. 113) (Total Sheets 8)
- ☒ Oath or Declaration (Total Pages 3)
a. ☒ Newly executed (original or copy)
b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 17 completed)
(Note Box 8 below)
I ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting
inventor(s) named in the prior application,
see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation by Reference (useable if Box 4b is checked)
The entire disclosure of the prior application, from which a
copy of the oath or declaration is supplied under Box 4b, is
considered to be part of the disclosure of the accompanying
application and is hereby incorporated by reference therein.

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

- ☐ Microfiche Computer Program (Appendix)
- Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
a. ☐ Computer Readable Copy
b. ☐ Paper Copy (identical to computer copy)
c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

- ☒ Assignment Papers (cover sheet & document(s))
- ☐ 37 C.F.R. § 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney
- ☐ English Translation Document (if applicable)
- ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
- ☐ Preliminary Amendment
- ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
- ☒ Small Entity Statement(s) ☐ Statement filed in prior application,
(PTO/SB-08-12) Status still proper and desired
- ☐ Certified Copy of Priority Document(s)
(If foreign priority is claimed)
- ☐ Other:

* NOTE FOR ITEMS 1 & 14: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY
FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.37), EXCEPT
IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.38).

- If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment
☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____
Prior application information: Examiner _____ Group / Art Unit: _____

18. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label (Insert Customer No. or Attach bar code label here) or ☒ Correspondence address below

Name Ronald R. Santucci
Pitney, Hardin, Kipp & Szuch, LLP
Address 711 Third Avenue, 20th Floor
City New York State New York Zip Code 10017
Country U.S.A. Telephone 212-687-6000 Fax 212-682-3485

Name (Print/Type) Ronald R. Santucci Registration No. (Attorney/Agent) 28,988
Signature [Signature] Date 09/18/00

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any
comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office,
Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents,
Box Patent Application, Washington, DC 20231.

Express Mail No. EK052282770US

Jc675 U.S. PTO
09/663995
09/18/00

FEE TRANSMITTAL

Patent fees are subject to annual revision on October 1.

These are the fees effective October 1, 1997.

Small Entity payments must be supported by a small entity statement, otherwise large entity fees must be paid. See Forms PTO/SB-09-12. See 37 C.F.R. §§ 1.27 and 1.28.

TOTAL AMOUNT OF PAYMENT (\$ 385.00

Complete If Known

Application Number
Filing Date
First Named Inventor H. Kenneth Staffin
Examiner Name
Group / Art Unit
Attorney Docket No. 2453-80A

METHOD OF PAYMENT (check one)

1. ☒ The Commissioner is hereby authorized to charge indicated fees and credit any over payments to:

Deposit Account Number Pitney, Hardin ...
Deposit Account Name 50-1145 (Order No. 2453-80A)

- ☒ Charge Any Additional Fee Required Under 37 C.F.R. §§ 1.16 and 1.17 ☐ Charge the Issue Fee Set in 37 C.F.R. § 1.16 at the Mailing of the Notice of Allowance

2. ☒ Payment Enclosed: Charge Dept. Acct.

☐ Check ☐ Money Order ☒ Other

FEE CALCULATION

1. BASIC FILING FEE

| Large Entity Fee Code (\$) | Small Entity Fee Code (\$) | Fee Description | Fee Paid |
|----------------------------|----------------------------|------------------------|----------|
| 101 790 | 201 395 | Utility filing fee | 345 |
| 106 330 | 206 165 | Design filing fee | |
| 107 540 | 207 270 | Plant filing fee | |
| 108 790 | 208 395 | Reissue filing fee | |
| 114 150 | 214 75 | Provisional filing fee | |
| SUBTOTAL (1) | | | (\$ 345 |

2. EXTRA CLAIM FEES

| Total Claims | Extra Claims | Fee from below | Fee Paid |
|--------------------|--------------|----------------|----------|
| 11 | 0 | 0 | 0 |
| Independent Claims | 0 | 0 | 0 |
| Multiple Dependent | 0 | 0 | 0 |

**or number previously paid, if greater; For Reissues, see below

| Large Entity Fee Code (\$) | Small Entity Fee Code (\$) | Fee Description |
|----------------------------|----------------------------|--|
| 103 22 | 203 11 | Claims in excess of 20 |
| 102 82 | 202 41 | Independent claims in excess of 3 |
| 104 270 | 204 135 | Multiple dependent claim, if not paid |
| 109 82 | 209 41 | ** Reissue independent claims over original patent |
| 110 22 | 210 11 | ** Reissue claims in excess of 20 and over original patent |

SUBTOTAL (2) (\$ 0

FEE CALCULATION (continued)

| Large Entity Fee Code (\$) | Small Entity Fee Code (\$) | Fee Description | Fee Paid |
|----------------------------|----------------------------|---|----------|
| 105 130 | 205 65 | Surcharge - late filing fee or oath | |
| 127 50 | 227 25 | Surcharge - late provisional filing fee or cover sheet | |
| 139 130 | 139 130 | Non-English specification | |
| 147 2,520 | 147 2,520 | For filing a request for reexamination | |
| 112 920* | 112 920* | Requesting publication of SIR prior to Examiner action | |
| 113 1,840* | 113 1,840* | Requesting publication of SIR after Examiner action | |
| 115 110 | 215 55 | Extension for reply within first month | |
| 116 400 | 216 200 | Extension for reply within second month | |
| 117 950 | 217 475 | Extension for reply within third month | |
| 118 1,510 | 218 755 | Extension for reply within fourth month | |
| 128 2,080 | 228 1,030 | Extension for reply within fifth month | |
| 119 310 | 219 155 | Notice of Appeal | |
| 120 310 | 220 155 | Filing a brief in support of an appeal | |
| 121 270 | 221 135 | Request for oral hearing | |
| 138 1,510 | 138 1,510 | Petition to institute a public use proceeding | |
| 140 110 | 240 55 | Petition to revive - unavoidable | |
| 141 1,320 | 241 660 | Petition to revive - unintentional | |
| 142 1,320 | 242 660 | Utility issue fee (or reissue) | |
| 143 450 | 243 225 | Design issue fee | |
| 144 670 | 244 335 | Plant issue fee | |
| 122 130 | 122 130 | Petitions to the Commissioner | |
| 123 50 | 123 50 | Petitions related to provisional applications | |
| 126 240 | 126 240 | Submission of information Disclosure Stmt | |
| 581 40 | 581 40 | Recording each patent assignment per property (time number of properties) | 40 |
| 146 790 | 246 395 | Filing a submission after final rejection (37 CFR 1.129(a)) | |
| 149 790 | 249 395 | For each additional invention to be examined (37 CFR 1.129(b)) | |
| Other fee (specify) | | | |
| Other fee (specify) | | | |
| SUBTOTAL (3) | | | (\$ 40 |

* Reduced by Basic Filing Fee Paid

SUBMITTED BY

Typed or Printed Name Ronald R. Santucci
Signature [Signature]
Date 09/18/00

Complete (if applicable)

Reg. Number 28,988
Deposit Account User ID

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

**VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY
STATUS (37 CFR 1.9(f) AND 1.27 (c)) - SMALL BUSINESS CONCERN**

Docket No.
2453-80A

Serial No.

Filing Date
herewith

Patent No.

Issue Date

Applicant/ **H. Kenneth Staffin, Edward P. Traina and Giovanni Rubino**
Patentee:

Invention: **FLUIDIZED BED GAS DISTRIBUTOR SYSTEM FOR ELEVATED TEMPERATURE OPERATION"**

I hereby declare that I am:

- ☐ the owner of the small business concern identified below:
☒ an official of the small business concern empowered to act on behalf of the concern identified below:

NAME OF CONCERN: Procedyne Corp.ADDRESS OF CONCERN: 11 Industrial Drive, New Brunswick, New Jersey 08901

I hereby declare that the above-identified small business concern qualifies as a small business concern as defined in 37 CFR 1.21.3-18, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees under Section 41(a) and (b) of Title 35, United States Code, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the above identified invention described in:

- ☒ the specification filed herewith with title as listed above.
☐ the application identified above.
☐ the patent identified above.

If the rights held by the above-identified small business concern are not exclusive, each individual, concern or organization having rights to the invention is listed on the next page and no rights to the invention are held by any person, other than the inventor, who could not qualify as an independent inventor under 37 CFR 1.9(c) or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:

- ☒ no such person, concern or organization exists.
☐ each such person, concern or organization is listed below.

FULL NAME _____
 ADDRESS _____

☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

FULL NAME _____
 ADDRESS _____

☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

FULL NAME _____
 ADDRESS _____

☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

FULL NAME _____
 ADDRESS _____

☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.


NAME OF PERSON SIGNING: H. KENNETH STAFFIN

TITLE OF PERSON SIGNING President

OTHER THAN OWNER: _____

ADDRESS OF PERSON SIGNING: 11 Industrial Drive
New Brunswick, New Jersey 08901

SIGNATURE: _____



DATE: September 1, 2000

FLUIDIZED BED GAS DISTRIBUTOR SYSTEM FOR
ELEVATED TEMPERATURE OPERATION

FIELD OF THE INVENTION

The present invention relates generally to the methods and apparatus for the debonding and sand core removal of sand cores from cast parts, the heat treating of metal parts and the removal of organic contamination from metal parts, and relates more specifically to an improved method and apparatus utilizing a fluid bed furnace equipped with an improved fluidizing gas distributor.

BACKGROUND OF THE INVENTION

In the casting of ferrous and non ferrous metal into parts, the cast part is formed by pouring the molten ferrous or non ferrous metal into a mold. When the part has internal openings or paths, sand cores are made using foundry sand and a binder to the shape of the internal openings or paths, and are positioned in the proper location in the mold. The molten metal is poured into the volume between the mold and the core(s) usually surrounding some or most of the core. When the metal solidifies, the mold is opened and the part is removed. In most cases, the core(s) remain in the interior regions its presence has formed and must be removed.

U.S. Patent No. 5,423,370, the disclosure of which is incorporated herein by reference, describes the invention of a fluid bed furnace for the removal of sand cores from castings, employing a thermal process based on the use of fluidized sand of the same type as used to make the sand core. This same patent describes the use of the fluid bed furnace for the heat treating of the aluminum castings.

In the case of ferrous and non ferrous metal parts formed by other methods than casting, the fluid bed has been established as an important processing approach for the heat treating and cleaning of parts and other objects in significant commercial applications. This is exemplified by U.S. Patent Nos. 4,512,821; 4,524,957; and, 4,547,228, the disclosures of which are incorporated herein by reference.

There are a number of known techniques to provide energy input to a fluid bed furnace to achieve the required temperature level of the fluidized solids bed and meet the energy requirement of the specific process being performed, plus the heat losses of the system. The source of energy input to a fluid bed furnace system is typically electricity or fuel such as natural gas or oil.

The mechanism of transferring the energy from an energy source to the fluidized solids bed is typically accomplished by one or a combination of the following methods:

Mechanism i: Heating the fluidizing gas phase before entering the furnace to a temperature above the operating temperature of the fluidized solids bed, as shown in Figure 1. When the high temperature fluidizing gas enters the fluid bed through the fluidizing gas distribution tuyeres, it provides the required energy input. This is termed "direct heating".

Mechanism ii: Transferring energy through heat transfer surfaces in contact with the fluidized solids bed, typically through heating tubes submerged in the fluidized solids bed, or through the walls of the vessel housing the fluidized

Mechanism iii: Direct injection of fuel into the fluidized solids bed in gaseous, liquid or solids form and combusting the fuel while it is within the fluidized solids bed; i.e., below the top level of the fluidized solids bed, as shown in Figure 3.

In applications where the products being process cannot be contacted by products of combustion of typical fuels, the mechanism of transferring energy to the fluid bed must be limited to indirect heating of the fluid bed by *Mechanism ii*, and/or indirect heating of the fluidizing gas to elevate its temperature followed by direct heating of the fluid bed by *Mechanism i*.

30 In cases where the combustion products of the typical fuels can contact the parts without quality degradation, and the operating temperature of the fluidized solids in the furnace is higher than the ignition temperature of the fuel, so there is no

concern about ensuring complete combustion of the fuel in the fluidized bed of solids, economical considerations generally favor *Mechanism iii*, above as shown in Figure 3. In Figure 3, the unit is shown equipped with both direct fuel injection and direct combustion air injection. In situations where the fluidizing gas is air, which is the case in many important commercial applications, the direct injection of combustion air is not required because the fluidizing air provides the necessary oxygen for combustion. It is only necessary to feed the fuel to the fluidized bed.

In most cases involving heat treating of metal parts, it is required to maintain careful control of the composition of the fluidizing gas. This requirement typically eliminates *Mechanism iii*, above from consideration for these applications.

For the very important application to sand core debonding of aluminum castings and heat treating aluminum castings and other aluminum parts, the processes take place at approximately 550°C. This temperature is below the ignition point of natural gas and other fuels so the use of *Mechanism iii*, is frequently eliminated based on safety concerns and/or the costs involved in protection devices to practice *Mechanism iii*, safely.

This typically limits consideration to *Mechanisms i* and *ii*, above for the important commercial applications involving processing of aluminum castings and other aluminum parts and heat treating of metals.

Mechanism i, is generally the lower cost approach to providing the required energy to the fluidized solids bed using a fluidizing gas heater to elevate the temperature of the fluidizing gas.

The maximum rate of energy transfer to the gas fluidized solids bed possible by this mechanism, is limited by the maximum temperature the furnace fluidizing gas distribution tuyere system can withstand mechanically, and the maximum fluidizing velocity that can be applied to the solids being fluidized without excessive entrainment of solids in the fluidizing gas exiting from the furnace.

The temperature of the fluidizing gas is typically elevated using a gas heater, and then feeding the high temperature fluidizing gas through the distribution tuyeres of the bed, as shown in Figure 1. The fluidizing gas heater can be either direct fuel fired when the products of combustion are acceptable in the gas phase of the fluidized solids, or indirectly heated by fuel or electricity when the application cannot accept products of combustion in the fluidizing gas phase.

The primary disadvantage to the use of *Mechanism i*, is that in applications requiring high rates of energy input to the gas fluidized solids, the temperature of the fluidizing gas must be significantly higher than the temperature of the fluidized solids bed.

This high temperature fluidizing gas elevates the temperature of the fluidized solids in the immediate vicinity of the fluidizing gas discharge tuyeres well above average bed temperature. This high temperature can in some cases, damage the parts being processed if the parts come close to, or contact a tuyere.

As an example, for the case of processing aluminum metal parts, a typical fluid bed furnace might be solution annealing the parts at 500°C in the bed of fluidizing solids with the fluidizing gas temperature at approximately 815°C. If an aluminum part comes in contact or in the close

vicinity of a fluidizing gas tuyere, the part can be melted or seriously distorted. In addition, there are typically small shavings, pieces, or chips of aluminum which fall from the parts being processed which find their way to the bottom of the fluid bed furnace and gradually accumulate over a period of time. When these pieces approach the vicinity of a tuyere, or contact a tuyere, they are usually melted and gradually surround the tuyeres and impede the flow of air.

The improved fluidizing gas distributor of this invention reduces the temperature of the fluidizing gas before it discharges through the tuyeres, thereby eliminating the local high temperature regions in the vicinity of the tuyere and eliminates the problem of melting or distorting the parts in the vicinity of the tuyeres.

This invention is a new improved approach to transferring energy into a fluidized bed and can benefit applications that can or cannot accept products of combustion of the energy source in the fluidization gas phase, and whether or not the temperature of the fluidized solids bed is above or below the ignition temperature of the fuel used as the energy source.

It accomplishes this broad application advantage by combining some of the concepts of *Mechanism i* and *Mechanism ii*, in an innovative arrangement of heating the fluidized solids by indirect heat transfer followed by direct heating by the fluidizing gas discharging from the gas distribution arrangement. This configuration can be particularly favorable for heat treating metal parts, cleaning metal parts, removing sand cores and enclosing molds from castings, but is also advantageous in some fluid bed reactor configurations involving fluid bed furnaces.

SUMMARY OF THE INVENTION

5 The invention comprises method and apparatus which overcomes the deficiency in typical fluidizing gas distributors when energy is supplied to a high temperature fluid bed furnace or reactor by high temperature fluidizing gas through the fluidizing gas distributor. This improved gas phase distributor involves a piping array which is mounted in the fluidized bed of solids which
10 conveys the high temperature fluidizing gas to the distribution tuyeres spaced in relatively uniform positions at an elevation in the lower portion of the bed of granular solids forming the fluidized solids. The distribution tuyeres are connected to
15 the bottom of the piping array and are contiguous with the pipes forming the array. The tuyeres are discharging the high temperature fluidizing gas in a downward direction causing the fluidized bed phenomenon to initiate at an elevation at or slightly below the point of discharge of the
20 tuyeres.

This configuration ensures that the piping array is at an elevation above the initiation of fluidization, and therefore, in the bed of
25 fluidized solids. This results in significant indirect heat transfer from the fluidizing gas in the distribution piping through the pipe walls of the array into the fluidized bed due to the generally favorable heat transfer behavior of
30 fluidized solids. This indirect heat transfer causes the temperature of the gas phase discharging through the tuyere distributors to be lower than the temperature of the fluidizing gas which was fed to the piping array. This condition yields a more
35 uniform temperature at the lower part of the

fluidized bed in the vicinity of the distribution tuyeres.

5 This gas phase distribution invention reduces or eliminates the high temperature zones in the vicinity of the distribution tuyeres which can degrade or destroy the parts being treated which are located near the lower portion of the fluid bed furnace and make it impossible to exploit the benefits of a fluid bed furnace with a directly
10 heated energy transfer mechanism involving high temperature fluidizing gas.

This gas phase distribution arrangement has the additional advantage that the downward direction of discharge of the tuyeres reduces the tendency of particles of solids to enter the piping
15 array through the tuyere gas phase discharge holes.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1, is a schematic drawing of a typical fluid bed furnace using elevated temperature fluidizing gas as the mechanism of transferring
20 energy into the bed of fluidized solids.

Figure 2, is a schematic drawing of a typical fluid bed furnace using indirect heating as the mechanism of transferring energy into the bed.
25 This figure shows indirect heating using a heating mantle to transfer heat through the wall of the fluid bed containing vessel as well as indirect heating tubes. The former approach is typically used for smaller furnaces when there is sufficient
30 vessel wall area relative to the volume of the fluid bed to transfer the required energy input. The number of heating tubes required depend upon the amount of indirect heat transfer area needed to meet the required heat transfer rate of the
35 process. Figure 2, also shows the optional use of

a fluidizing gas heater to further supplement the heat transfer rate to the bed of fluidized solids.

Figure 3, is a schematic drawing of a typical fluid bed furnace arrangement using direct injection of fuel into the fluidized bed as the mechanism of transferring energy into the bed. In this configuration the fuel is typically gaseous, for example natural gas, or liquid, for example, oil. This furnace is equipped with a distributor plate containing tuyeres.

Figure 4, is a schematic drawing of a typical fluid bed furnace equipped with the improved fluidized bed gas distributor system of this invention for processing parts in typical sand core debonding and heat treating of aluminum castings and other metals.

Figure 5, is a top plan and side view of the improved fluidizing gas distributor.

Figure 6, is a side section and top plan view of a downward discharging tuyere of an improved fluidizing gas distributor.

Figure 7, is a side partially sectional view of the improved fluidizing gas distributor equipped with a direct firing positive displacement burner firing directly into the piping array of the fluidizing gas distributor.

Figure 8, is a side sectional view of the preferred embodiment of the improved fluidizing gas distributor in a large scale aluminum casting sand core debonding application, where the feed of casting is on the basis of a generally repetitive cycle basis.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Turning now to the figures where like parts will be similarly numbered, Figure 4, shows a high temperature fluidized bed furnace 10 in one typical

configuration involving the processing of a major metal part. This furnace is equipped with a fluidized bed gas distributor 12. This gas distributor 12 is shown in more detail in Figure 5 and the downward discharging tuyere generally designated 14 is shown in Figure 6.

In this invention, high temperature fluidizing gas is distributed through the furnace 10 in a horizontal plane by a piping array 16 as shown in Figures 4, 5, and 6. With the discharge of the fluidizing gas from the tuyeres 14 located below the distributing piping array 16, the elevation level of initiation of fluidization of the solids is below the piping array 16. Therefore, the piping array 16 has fluidized solids bed 18 all around it, and the heat transfer rate from the piping array 16 to the bed of gas fluidized solids benefits from the typically favorable heat transfer coefficients between heat transfer surfaces in contact with gas fluidized solids and the fluidized solids themselves. Typically in applications involving foundry sands for the particles, the heat transfer coefficients are in the range of 20 to 100 BTU/hr. ft²°F.

Referring to Figure 4, the high temperature fluidizing gas 20 enters the piping array 16 through a feed port 22 in the side of the furnace vessel wall 24, and flows to the array of connecting pipes 16 which are continuous with the feed pipe 22. This piping array 16 is shown in Figure 5. Referring to Figure 5, the entry of the high temperature fluidizing gas is through feed port 22. The flow is typically into the main header pipe 26, into the piping array of branches 28, and out through the holes in the downward discharging tuyeres 32. The gas phase then turns in its typical upward direction in the fluidized

bed. Figure 6, shows one embodiment of a downward discharging tuyere 32.

With the high rate of convective heat transfer from the piping array 16 to the fluidized bed of solids 18, the temperature of the fluidizing gas discharging from the tuyeres 32, is lowered from its feed temperature through port 22, to a temperature considerably closer to the fluidized bed temperature.

Thus the energy input to the fluidized solids is divided between that being convectively transferred indirectly from the high temperature gas flowing through the piping array 16 through the pipe wall 34 to the fluidized solids bed, while the remainder of energy transferred into the fluidized solids is achieved by the direct introduction of the fluidizing gas through the tuyeres 32 into the fluidized solids.

By increasing the heat transfer area of the piping array 16, it is possible to reduce the temperature of the fluidizing gas exiting from the tuyeres 32 to a level close enough to fluidized bed temperature to avoid any damage to parts in the vicinity of the tuyere discharge.

In addition, with the tuyeres 32 mounted in a downward direction, it is possible to conveniently fasten a grating or screen to the top of the piping array without disturbing the uniform flow pattern existing from the tuyeres 32 to prevent small parts or pieces of casting material from falling into the vicinity of the tuyere discharge and either blocking the discharge or in the case of lower melting point metal parts like aluminum, from softening or melting from too high a temperature of tuyere discharge.

Preferred embodiments of this invention are shown in Figures 4 and 8, but there are other

arrangements possible to achieve the benefits of this design approach. Figure 4, is more typical of lower volume processing where loads are fed through a feed door 36 typically in the top of the furnace.

5 Figure 7, shows a preferred embodiment of this invention for the case of parts which can be subjected to fuel combustion gas phase contact without damage to the parts. In this situation, an economical preferred embodiment is to mount a
10 positive displacement burner 38 discharging directly into the gas distribution array, as shown.

Figure 8, is more typical of larger volume processes where parts are fed by conveyor 40 on a repetitive basis through the furnace system.

15 Referring to Figure 8, there is seen diagrammatically a typical continuous or semi-continuous thermal process for carrying out the method of the invention with respect to sand core removal involving high volume production
20 operations. This is a typical example of an application of the invention. The application can be practiced with other configurations of fluid bed furnace and/or mechanical conveyors.

25 A fluidized bed furnace 42 is equipped with a continuous conveyor 40, which can be a chain type or any of the conveyors of this general category. The conveyor is conveying baskets or fixtures 44, which are capable of holding the castings 46 and moving them singly or in groups continuously, or
30 cyclically (semi-continuously) through the furnace 42 in a uniform manner and at a linear speed which is adjusted to achieve the required residence time of the parts 46 in the furnace.

35 The parts enter the furnace, vestibule 48 through a door 50, which can be automatically opened and closed. After door 50 is closed, the following door 52, opens to allow the basket or

2025 RELEASE UNDER E.O. 14176

fixture 46 to leave the vestibule 48, and enter the furnace volume 54. These feed doors 50 and 52 keep alternately opening and closing as conveyor 40 moves the successive line of baskets or fixtures through the furnace to the discharge vestibule 56.

The parts exit the furnace into the discharge vestibule 56 through door 58.

After the discharging basket or fixture 44 enters the discharge vestibule 56, door 58 closes and door 60 opens to allow the basket or fixture to exit the vestibule 56 and continue to the next processing step for the castings or to an unloading area where the casting 46 is removed from the basket or fixture, if this process only involves sand core debonding. These discharge doors 58 and 60 keep alternately opening and closing as conveyor 40 moves the successive line of baskets or fixtures out of the furnace 42.

Furnace 42, contains a bed of fluidized solids 62, which in the preferred embodiment is fluidized foundry sand of the same composition and size ranges as was used to manufacture the sand cores which are being removed in this furnace. The level of fluidized solids is such so that the declining elevation of conveyor 40, at the feed end, followed by a horizontal level, and then followed by the inclining elevation of conveyor 40, at the discharge end, are such that the baskets or fixtures 44, containing the parts 46, are passed through the bed of fluidized solids at a controlled rate.

The fluidizing air to create the fluidized bed of granular solids is typically ambient air pumped by blower 64, through air heater 66, and through distribution duct 68, which feeds the heated air to the piping array 16, which forms the improved air distribution system which feeds the fluidizing air

to the downward directed tuyeres 32, into the fluidized bed 62, which accomplishes uniform distribution of the air into the fluidized solids thereby levitating the granular particles and creating the fluidized solids phenomenon at an elevation below the distribution piping array.

The heated fluidizing air also provides the required energy to maintain and control the fluidized solids at the temperature required to debond the sand cores by convective heat through the walls 34 of the piping array 16 forming the improved fluidizing air distribution system and subsequently, after its temperature has been reduced by this convective heat transfer, by discharging through the ports or holes 30 of the downward discharging tuyeres 32 directly into the bed of fluidized solids when it gives up additional energy to the fluidized solids as its temperature is reduced to the temperature of the fluidized solids bed.

Thus the temperature of the fluidized solids in the vicinity of the discharge of the discharge of the tuyeres is not as high with this improved fluidizing air distribution system due to the indirect convective heat transfer through the piping array 16, as it would be in the absence of this innovative improvement. With this reduction in fluidizing air temperature exiting from the tuyeres 32, the problem of castings or parts being damaged due to close proximity to the tuyeres is eliminated as well as the problem of pieces of aluminum or other discard pieces of the part which are removed from the casting and fall to the bottom of the furnace where they can be melted by the high temperate fluidizing air discharges from tuyeres.

The temperature and residence time of an aluminum casting in furnace 42 to accomplish the

thermal decomposition of the bonding agent is typically accomplished in the temperature range of 450°C to 550°C with the parts at temperature approximately 20 to 90 minutes depending upon the geometry and size of the parts involved.

The added foundry sand from the sand cores which flows into the fluidized bed is discharged from the furnace by overflowing through overflow pipe 70 and is then collected, cooled, sometimes sieved, and is typically ready for reuse.

The fluidizing gas from the bed of fluidized solids 62 exits the furnace through duct 72, is then passed through an off-gas treatment, system 24, typically comprising a cyclone for particulate removal and an afterburner to oxidize any volatile organic carbon (VOC) compounds from the thermal decomposition of the sand core binding agent and then through an exhauster 76, which maintains the fluidized bed furnace 42 under a slightly negative pressure, typically less than 0.5 inches w.c. and causes the fluidizing gas to exit the furnace system.

When the requirement for sand core debonding is subsequently followed by a solution annealing heat treating step, the same system shown in Figure 2, may be employed for both steps with the exception that fluidized bed furnace 42 must be made sufficiently long to provide for the residence time requirements to accomplish both processing steps.

The following application involving aluminum automotive engine parts was performed in a pilot plant operation which simulated the process of this invention:

Parts: Aluminum castings/Engine blocks
 Engine block: 195 Kg each
 Sand mold and cores weight: 45 Kg in and surrounding
 each block

5 No. of blocks/test: 2

Sand Core

Debonding

Conditions:

Temperature: 500°C

Residence Time: 90 minutes

10

Environment: Fluidized Solids/
 Foundry Sand

Heat Treating

Conditions:

Temperature: 500°C

Residence Time: 5 hrs.

15

This was total time including the 90
 minutes of sand core debonding.

Both operations were conducted in
 the same furnace in series.

Quench:

20

Rapid quench to 200°C in a fluidized
 solids bed of foundry sand.

Fluidized solids cooled using water
 cooling coils.

Aging:

25

3 hrs. at 230°C in fluidized bed
 aging furnace Ambient Air Cooling to
 60°C.

Heat Treating

results:

Blocks achieved a Brinell Hardness
 of 93-109.

30

It should be understood that the preferred
 embodiments of this process have been disclosed by
 way of examples, and that other modifications may

What Is Claimed Is:

1. A gas phase distributor in a fluid bed reactor or furnace comprising a gas phase piping array discharging into a fluid bed of granular solids through a plurality of tuyeres which are coupled to
5 and mounted beneath the piping array such that the granular solids are fluidized at a vertical elevation below the piping array thereby causing elevated temperature fluidizing gas to indirectly heat the fluidized bed through the piping array
10 prior to entering the fluidized bed through the tuyeres.
2. The gas phase distributor of claim 1, where the discharge from the piping array is through openings or ports in a bottom portion of the piping array.
3. The gas phase distributor of claim 2 comprising a heat exchanger in a feed line to the gas phase distributor such that the heat exchanger location is above a vertical elevation of
5 fluidizing gas distribution ports and submerged in the fluidized solids, thereby permitting indirect heat transfer from elevated temperature fluidizing gas so as to transfer energy to fluidized solids prior to entering the fluidized bed through the gas
10 distributor ports.
4. The gas phase distributor of claim 1, wherein gaseous fuel is combusted with air to achieve high temperature combustion gas products, which is fed through the piping array in the fluid bed furnace
5 transferring energy through the piping array to the fluid bed furnace thereby lowering the temperature

of the gas discharging through the tuyeres into the fluidized bed.

5 5. The gas phase distributor of claim 3, wherein gaseous fuel is combusted with air to achieve high temperature combustion gas products, which is fed through the piping array in the fluid bed furnace transferring energy through the piping array to the fluid bed furnace thereby lowering the temperature of the gas discharging through the ports into the fluidized bed.

6. The gas phase distributor of claim 4, where the fuel is a liquid fuel.

7. The gas phase distributor of claim 5, where the fuel is a liquid fuel.

8. The gas phase distributor of claim 1, wherein the discharge direction of the tuyeres initiates fluidization of the granular particles at an elevation below the distribution piping array to ensure the piping array is submerged in fluidized solids which provides for a high heat transfer coefficient from the piping array to the fluidizing solids, thereby reducing the temperature of the fluidizing gas prior to the discharging through the tuyeres.
10

9. The gas phase distributor of claim 2, wherein the discharge direction of the openings initiates fluidization of the granular particles at an elevation below the distribution piping array to ensure the piping array is submerged in fluidized solids which provides for a high heat transfer coefficient from the piping array to the fluidizing solids, thereby reducing the temperature of the
5

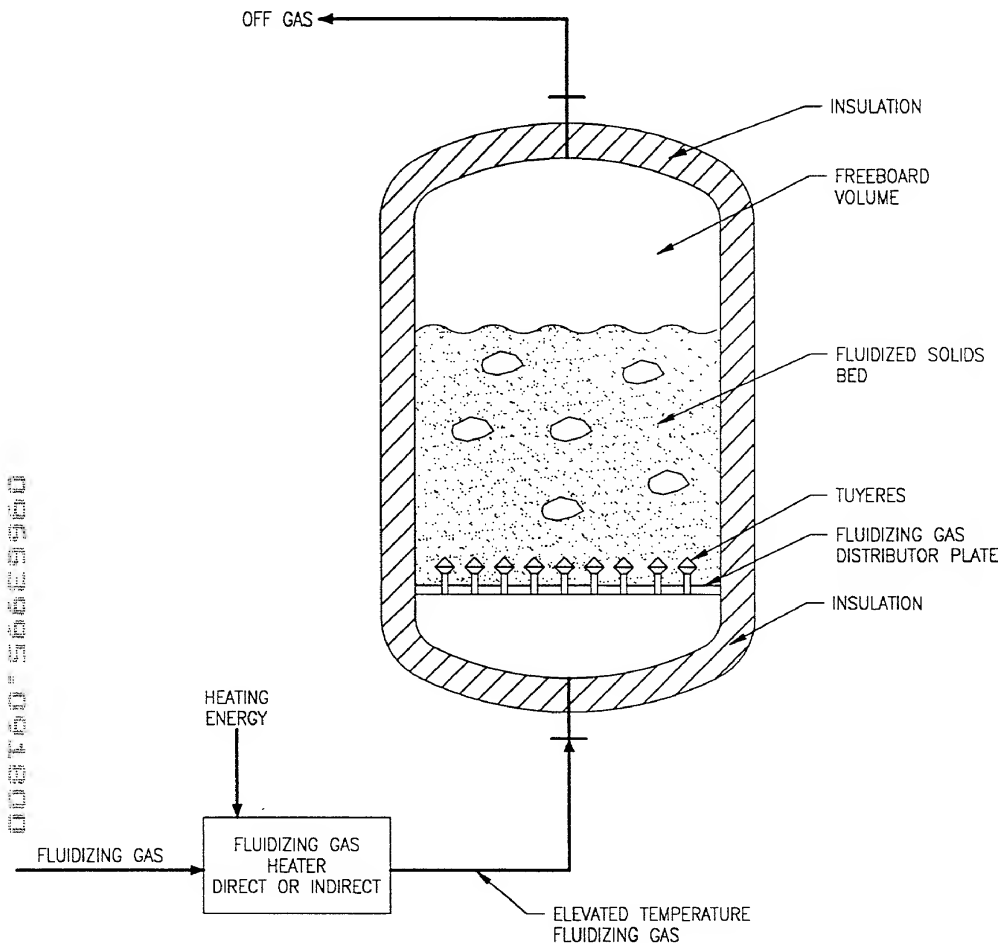


FIGURE 1: FLUID BED FURNACE – HEATING VIA
HIGH TEMPERATURE FLUIDIZING GAS

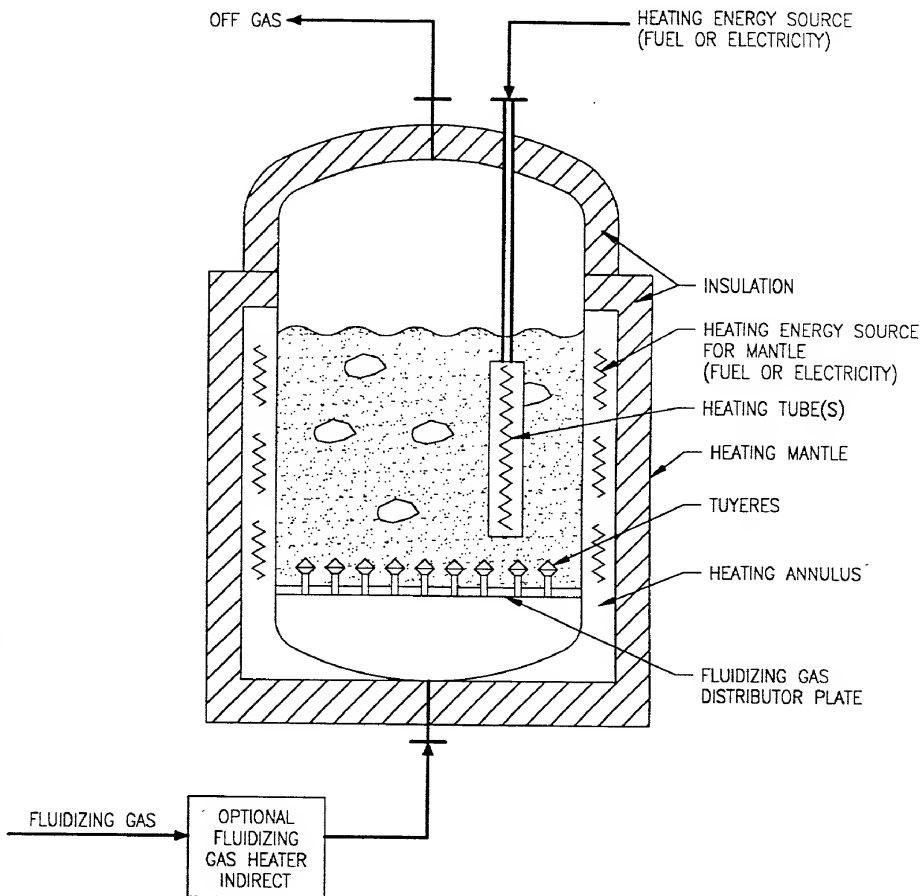


FIGURE 2: FLUID BED FURNACE - INDIRECT HEATING

A schematic diagram of a fluidized bed combustor. The vessel is a vertical cylinder with a hatched outer wall. At the bottom, a horizontal line represents the fluidizing gas distributor plate, with several upward-pointing arrows indicating the flow of fluidizing gas. Above this plate is the fluidized solids bed, depicted as a region filled with small dots and larger irregular shapes. Two horizontal lines enter the bed from the left: the upper one is labeled 'COMBUSTION AIR' and the lower one is labeled 'FUEL INJECTION'. At the top of the vessel, a horizontal line exits to the left, labeled 'OFF GAS'. The space above the fluidized bed is labeled 'FREEBOARD VOLUME'.

FIGURE 3: FLUID BED FURNACE – DIRECT FUEL INJECTION

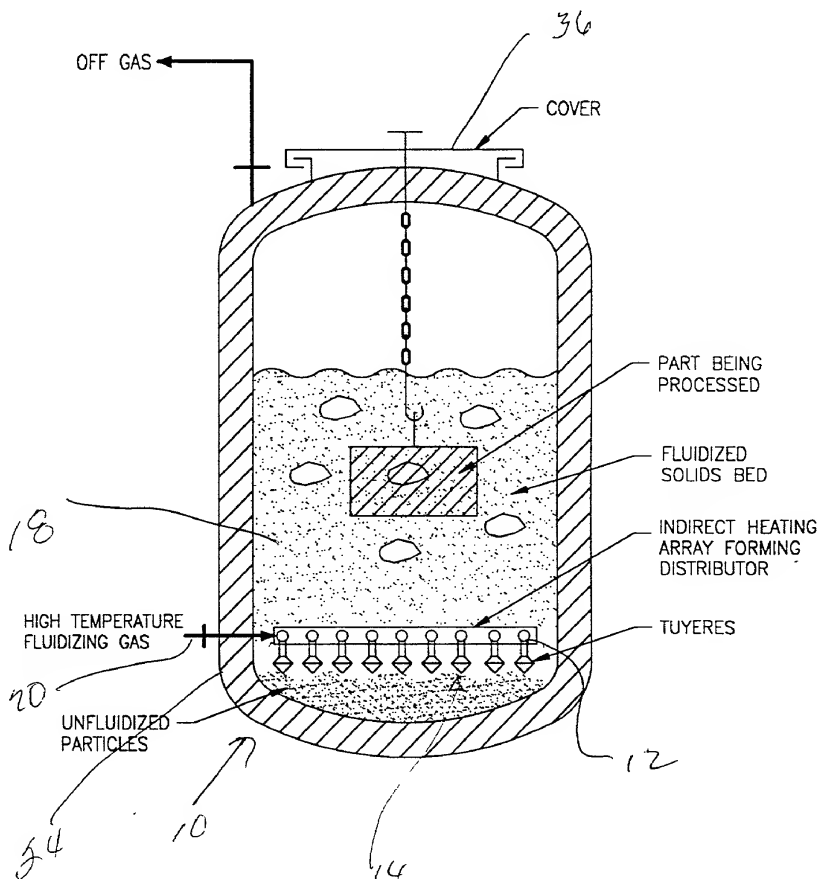
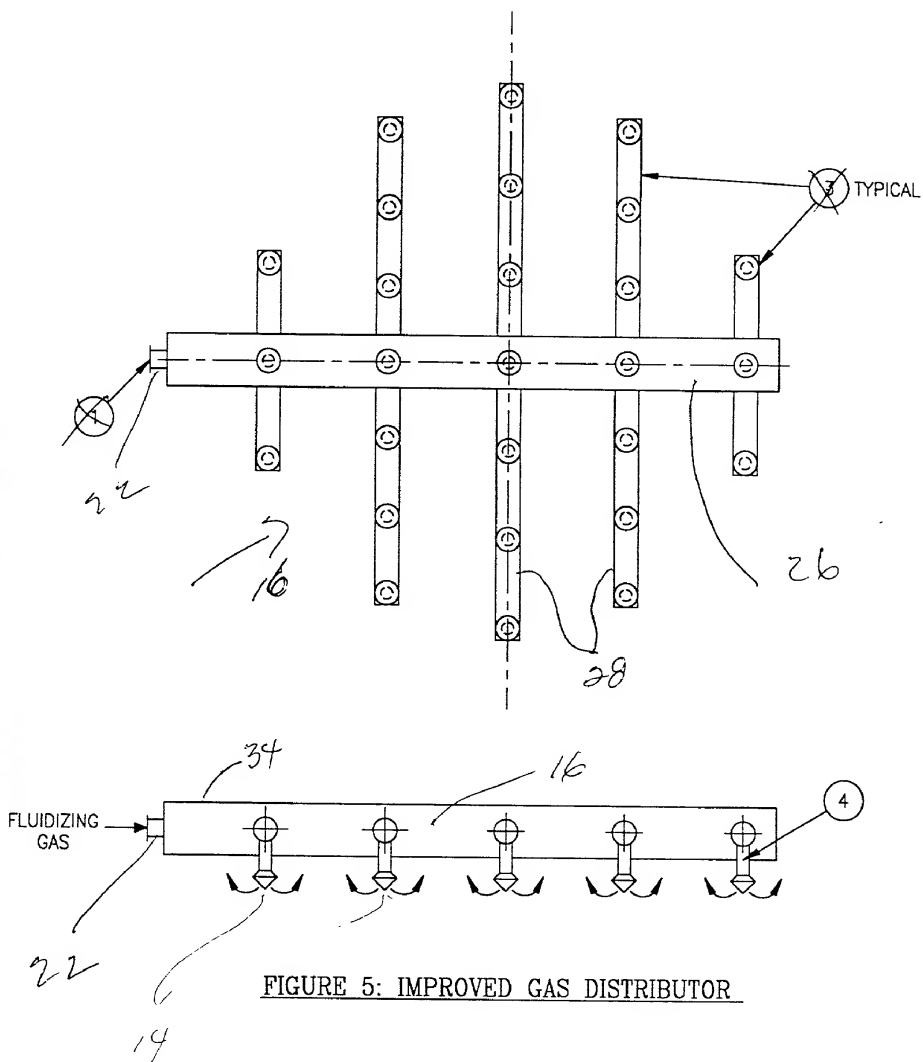


FIGURE 4: IMPROVED FLUIDIZING GAS PHASE DISTRIBUTION SYSTEM



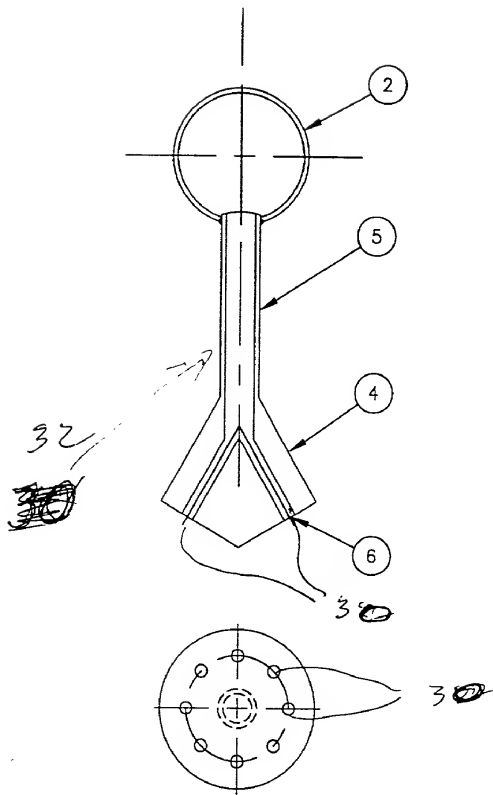


FIGURE 6: TUIERE DISTRIBUTOR

006395 091000

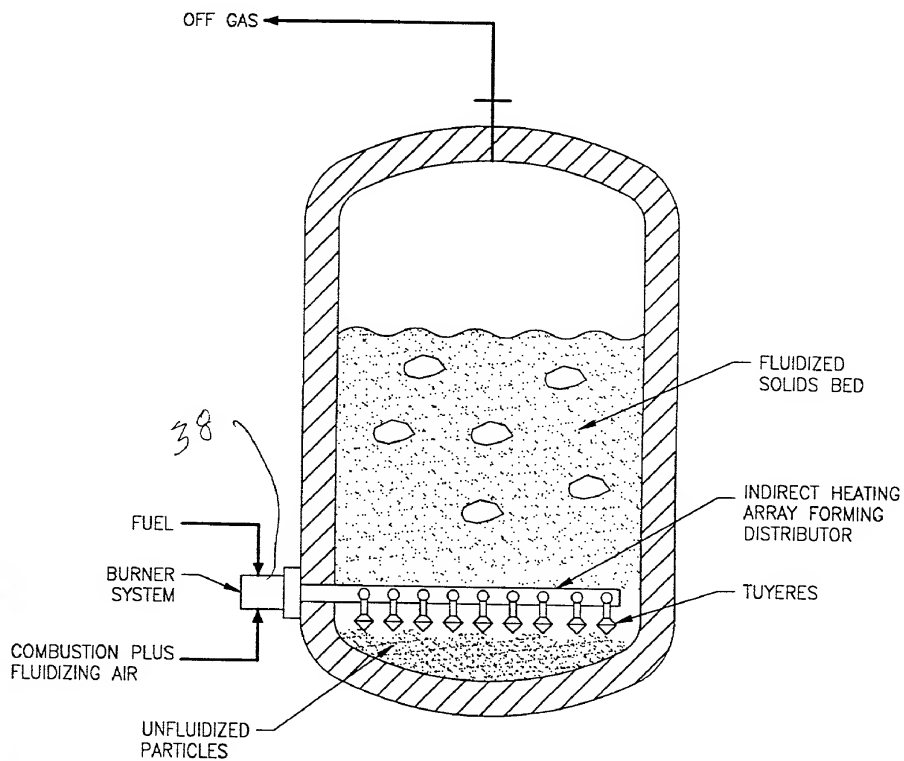


FIGURE 7: BURNER FIRED DISTRIBUTION SYSTEM

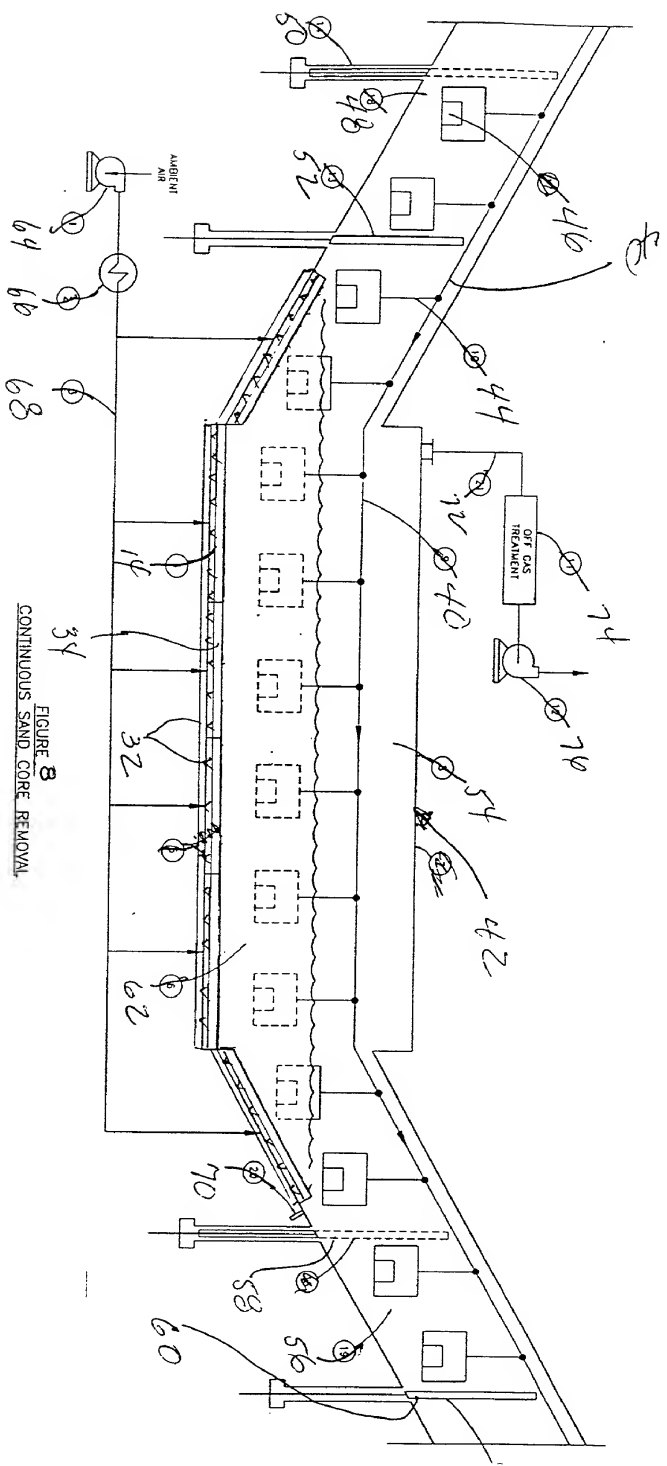


FIGURE 8
CONTINUOUS SAND CORE REMOVAL

09663095 091800

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)
Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63)

☒ Declaration Submitted with Initial Filing OR ☐ Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)

| | |
|--------------------------|--------------------|
| Attorney Docket Number | 2453-80A |
| First Named Inventor | H. Kenneth Staffin |
| COMPLETE IF KNOWN | |
| Application Number | / |
| Filing Date | |
| Group Art Unit | |
| Examiner Name | |

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

"Fluidized Bed Gas Distributor System for Elevated Temperature Operation"

the specification of which (Title of the invention)

☒ is attached hereto

OR

☐ was filed on (MM/DD/YYYY) as United States Application Number or PCT International

Application Number and was amended on (MM/DD/YYYY) (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

| Prior Foreign Application Number(s) | Country | Foreign Filing Date (MM/DD/YYYY) | Priority Not Claimed | Certified Copy Attached? | |
|-------------------------------------|---------|----------------------------------|--------------------------|--------------------------|--------------------------|
| | | | <input type="checkbox"/> | YES | NO |
| | | | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | | | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | | | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

| Application Number(s) | Filing Date (MM/DD/YYYY) | <input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto. |
|-----------------------|--------------------------|--|
| | | |

(Page 1 of 3)

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

(July 1998)

Express Mail No. EK052282770US

DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

| U.S. Parent Application or PCT Parent Number ~ | Parent Filing Date (MM/DD/YYYY) | Parent Patent Number (If applicable) |
|--|---------------------------------|--------------------------------------|
| | | |

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

☐ Customer Number OR ☒ Registered practitioner(s) name/registration number listed below

Place Customer Number Bar Code Label here

| Name | Registration Number | Name | Registration Number |
|--------------------|---------------------|-------------------|---------------------|
| Joseph C. Sullivan | 18,720 | John F. Gulbin | 33,180 |
| Gerald Levy | 24,419 | Matthew W. Siegal | 32,941 |
| Ronald R. Santucci | 28,988 | | |
| Ronald E. Brown | 32,200 | | |


☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto

Direct all correspondence to: ☐ Customer Number OR ☒ Correspondence address below

| | | | | | | | |
|---------|----------------------------------|-----------|--------------|-----|-------|--------------|--|
| Name | Ronald R. Santucci | | | | | | |
| Address | Pitney, Hardin, Kipp & Zsuch LLP | | | | | | |
| Address | 711 Third Avenue, 20th Floor | | | | | | |
| City | New York | State | NY | ZIP | 10017 | | |
| Country | U.S.A. | Telephone | 212-687-6000 | | Fax | 212-682-3485 | |

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor: ☐ A petition has been filed for this unsigned inventor

| | | | | | | | |
|--|---|-------|----|------------------------|--------|-------------|--------|
| Given Name (first and middle (if any)) | | | | Family Name or Surname | | | |
| H. Kenneth | | | | Staffin | | | |
| Inventor's Signature |  | | | | | Date | 9/1/00 |
| Residence: City | Colonia | State | NJ | Country | U.S.A. | Citizenship | US |
| Post Office Address | 36 Avalon Drive | | | | | | |
| Post Office Address | | | | | | | |
| City | Colonia | State | NJ | ZIP | 07067 | Country | U.S.A. |

☒ Additional inventors are being named on the _____ supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto

Please type a plus sign (+) inside this box → +

PTO/SB/02A (3-97)
Approved for use through 9/30/98. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION

ADDITIONAL INVENTOR(S)
Supplemental Sheet
Page 3 of 3

| | | | | | | | |
|---|-------------------------|-------|----|---|--------|-------------|--------|
| Name of Additional Joint Inventor, if any: | | | | <input type="checkbox"/> A petition has been filed for this unsigned inventor | | | |
| Given Name (first and middle (if any)) | | | | Family Name or Surname | | | |
| Edward P. | | | | Traina | | | |
| Inventor's Signature | <i>Edward P. Traina</i> | | | Date | 9/1/00 | | |
| Residence: City | Sayreville | State | NJ | Country | U.S.A. | Citizenship | US |
| Post Office Address 26 Jensen Road | | | | | | | |
| Post Office Address | | | | | | | |
| City | Sayreville | State | NJ | ZIP | 08872 | Country | U.S.A. |
| Name of Additional Joint Inventor, if any: | | | | <input type="checkbox"/> A petition has been filed for this unsigned inventor | | | |
| Given Name (first and middle (if any)) | | | | Family Name or Surname | | | |
| Giovanni | | | | Rubino | | | |
| Inventor's Signature | <i>Giovanni Rubino</i> | | | Date | 9/1/00 | | |
| Residence: City | Branchburg | State | NJ | Country | U.S.A. | Citizenship | Italy |
| Post Office Address 1313 Boxwood Drive | | | | | | | |
| Post Office Address | | | | | | | |
| City | Branchburg | State | NJ | ZIP | 08876 | Country | U.S.A. |
| Name of Additional Joint Inventor, if any: | | | | <input type="checkbox"/> A petition has been filed for this unsigned inventor | | | |
| Given Name (first and middle (if any)) | | | | Family Name or Surname | | | |
| | | | | | | | |
| Inventor's Signature | | | | Date | | | |
| Residence: City | | State | | Country | | Citizenship | |
| Post Office Address | | | | | | | |
| Post Office Address | | | | | | | |
| City | | State | | ZIP | | Country | |

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

(July 1998)